


2" NPT SCREWPLUG HEATER

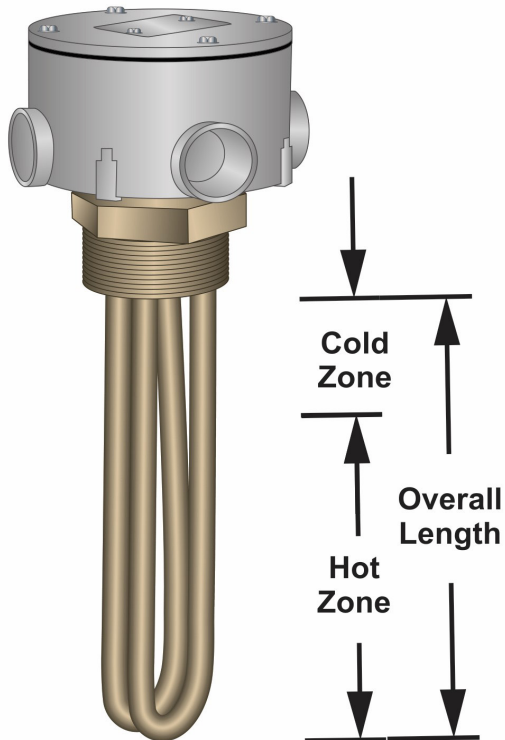

INFORMATION

- Durable, efficient chemical heater
- 316 stainless steel or titanium elements suitable for use in most aqueous alkaline solutions and rinse tanks
- 2 inch screwplug heater
- Power range: 4500-15000 watts
- Operates on 240-480 volts

FEAUTRES

- 316 stainless steel or titanium elements suitable for use in most aqueous alkaline solutions and rinse tanks
- Watt densities:
 - 316 stainless steel: 45-55 watts/square inch
 - Titanium: <60 watts/square inch
- Vapor resistant, flame retardant PVC terminal enclosure
- Grounded construction



STANDARD PARTS

MPI P/N	MATERIAL	WATTS	VOLTS	OVERALL LENGTH	THREAD SIZE
IM-2T2208	Stainless Steel	2000 W	240 V	8 "203 mm	2" NPT
IM-2T2408	Stainless Steel	2000 W	480 V	8 "203 mm	2" NPT
IM-2T3212	Stainless Steel	3000 W	240 V	12 "305 mm	2" NPT
IM-2T3412	Stainless Steel	3000 W	480 V	12 "305 mm	2" NPT
IM-2T4218	Stainless Steel	4000 W	240 V	18 "457 mm	2" NPT
IM-2T4418	Stainless Steel	4000 W	480 V	18 "457 mm	2" NPT
IM-2T6225	Stainless Steel	6000 W	240 V	25 "635 mm	2" NPT
IM-2T6425	Stainless Steel	6000 W	480 V	25 "635 mm	2" NPT
IM-2T8232	Stainless Steel	8000 W	240 V	32 "813 mm	2" NPT
IM-2T8432	Stainless Steel	8000 W	480 V	32 "813 mm	2" NPT
IM-2T10240	Stainless Steel	10000 W	240 V	40 "1016 mm	2" NPT
IM-2T10440	Stainless Steel	10000 W	480 V	40 "1016 mm	2" NPT
IM-2T12448	Stainless Steel	12,000 W	480 V	48 "1219 mm	2" NPT
IM-2T15454	Stainless Steel	15000 W	480 V	54 "1372 mm	2" NPT
IM-T2T2208	Titanium	2000 W	240 V	8 "203 mm	2" NPT
IM-T2T2408	Titanium	2000 W	480 V	8 "203 mm	2" NPT
IM-T2T4218	Titanium	4000 W	240 V	18 "457 mm	2" NPT
IM-T2T4418	Titanium	4000 W	480 V	18 "457 mm	2" NPT
IM-T2T6225	Titanium	6000 W	240 V	25 "635 mm	2" NPT
IM-T2T6425	Titanium	6000 W	480 V	25 "635 mm	2" NPT
IM-T2T8232	Titanium	8000 W	240 V	32 "813 mm	2" NPT
IM-T2T8432	Titanium	8000 W	480 V	32 "813 mm	2" NPT
IM-T2T12448	Titanium	12,000 W	480 V	48 "1219 mm	2" NPT

*Single phase standard, 3-phase available.

3-4 Week Lead Time for Standard & Custom Products!

ORDER CODE

IM-X	XX	X	XX		
SERIES	WATTAGE	VOLTAGE	OVERALL LENGTH	PHASE / OPTIONS	
2T 316 stainless steel	2 2000W	1 120V	8 2kW	No designator = Single Phase (std)	
T2T Titanium	3 3000W	2 240V	12 3kW	-3 = Three phase power (three elements)	
IN2T Incoloy	4 4000W	3 380V	18 4kW	-M2 = Explosion / Moisture Resisting Housing	
	6 6000W	4 480V	25 6kW	-W = Thermowell	
	8 8000W	5 415V	32 8kW	-T = Integral thermostat	
	10 10000W	6 600V	40 10kW (SS Only)	EX. IM-T2T4218-W 2" NPT TITANIUM Immersion Heater, 4kW, 240V, 18" Overall Length w/ Thermowell	
	12 12000W	7 400V	48 12kW		
	15 15000W	8 208V	54 15kW (SS Only)		
		9 220V			
		0 200V			